


# BOWERY LANE BICYCLES

HANDMADE IN NYC

## Quick assembly guide for your new Bowery Lane Bicycle

These instructions are in no way meant to supplant the complete instructions and safety recommendations found at [www.bowerylanebicycles.com/instructions](http://www.bowerylanebicycles.com/instructions)


### Supplies you need:

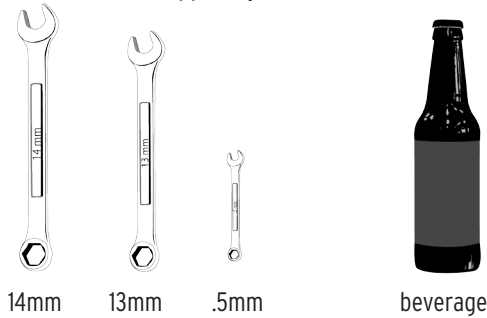

1. Remove all contents from the cardboard box and prepare a work area large enough to accommodate your bike assembly.



2. Attach the kick stand to the frame using a 14mm wrench. The stand is installed behind the peddle crank but should not interfere with the turning of the back wheel. Once your stand is installed, use it to keep bike upright for the completion of the assembly.

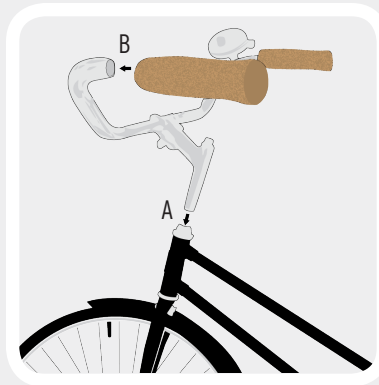

3. A). Insert the handlebar stem into the bike frame and tighten using a 13mm wrench. B). Install the handlebars into the stem making their ends face the direction of the eventual rider. The handlebars are tightened using a 14mm wrench. Once handlebars are secured, push the cork grips onto the ends of handlebars. \*\*We strongly recommend that the cork grips be glued in place using a strong adhesive such as Gorilla glue.



4. Next, insert the seat-post into the bike frame cavity. Secure it by tightening the seat lug. You will need a 13mm wrench for this task. The same tools will be used to secure the saddle to the seat post. Your seat should be horizontal with a slight lift at the front for optimal comfort.



5. Peddles are installed by hand and tightened using a 15mm wrench. Be aware that the left side peddle meshes in the opposite clockwise direction. You will need to screw it by turning right.



6. Finally, the crate is installed on the back rack using the hardware included with your bike. Sit the crate on the rack with the two holes closest to the front. Insert the two metal screws into the pre-drilled holes and secure to the metal rod using the two washers and nuts. Metal rod should be positioned along one of the rack's parallel bars.

Don't over-tighten any parts for your Initial assembly. You will likely need to adjust to your specific riding needs.

Handlebars, handlebar stem, seat post and seat should be adjusted to the riders comfort and safety.

Experts recommend the rider's seated position allows the leg to extend to the peddles with a slight bend at the knee

Peel the backing of the badge and affix it (while centering) carefully to the front tube below the handlebars.

